

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 612 504 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**12.11.1997 Bulletin 1997/46**

(51) Int. Cl.<sup>6</sup>: **A61B 17/06**

(21) Application number: **94301287.2**

(22) Date of filing: **23.02.1994**

### (54) Peelable foil suture package

Verpackung für Nahtmaterial mit abziehbaren Folien

Empaquetage pour sutures à feuillel pelables

(84) Designated Contracting States:  
**AT BE CH DE DK ES FR GB IE IT LI LU MC NL PT  
SE**

(30) Priority: **24.02.1993 US 21814**

(43) Date of publication of application:  
**31.08.1994 Bulletin 1994/35**

(73) Proprietor: **ETHICON INC.  
Somerville New Jersey 08876 (US)**

(72) Inventors:  
• **Cerwin, Robert  
Pipersville, Pennsylvania 18947 (US)**

• **Trew, Cheryl  
Somerset, New Jersey 08873 (US)**  
• **Gibbs, Robert J.  
Flemington, New Jersey 08822 (US)**

(74) Representative:  
**Fisher, Adrian John  
CARPMAELS & RANSFORD  
43 Bloomsbury Square  
London WC1A 2RA (GB)**

(56) References cited:  
**US-A- 4 135 622                      US-A- 5 131 533**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 612 504 B1**

**Description****FIELD OF THE INVENTION**

5 This invention relates to a peelable foil package for sutures and, in particular, for absorbable and pre-moistened nylon sutures.

**BACKGROUND OF THE INVENTION**

10 It is important for sutures to be easily and quickly supplied to sterile or scrubbed personnel working in a sterile field of use. Typically what is considered to be a sterile field is a designated area in which everything to be touched or used in surgery or a medical procedure is to remain sterile. It is important that the sterile personnel working in the sterile field do not contaminate the field by touching unsterilized packages. Therefore any suture packaging transferred into the sterile field must be sterile.

15 It is also important that once in the sterile field, a sterile user, can easily and quickly ready the sutures for use without compromising suture sterility.

In packaging absorbable sutures, it is important to provide a barrier to moisture and oxygen and prevent the moisture and oxygen from entering the package. It is well known that water will react with absorbable suture material to cause the polymer structure to break down. Even minute amounts of water or moisture can accelerate absorbable suture degradation. Some stability studies have indicated oxygen also may cause suture degradation.

20 In the packaging of hydrophilic nylon sutures, the sutures are pre-moistened and packaged in a humid environment so that the nylon material will remain pliable. It is important to provide a barrier to moisture to prevent the moisture from escaping the packaging. Thus a similar packaging is used for pre-moistened nylon sutures as is used for absorbable sutures.

25 Presently, both absorbable sutures and pre-moistened nylon sutures are packaged in foil and have a secondary plastic and paper overwrap. In the existing art, the foil packaging for absorbable and pre-moistened nylon sutures is made from two or more sections of foil having a polymer lamination or coating to enhance the ability of the foil to act as a sufficient barrier to moisture and oxygen. It is believed that the intimacy of the bonds of the lamination or coating with the foil plays a significant role in closing off voids in the foil. An example of polymer laminated foil suture packaging is described in U.S. patent No. 4,014,433 and US-A-4 135 622.

30 US-A-4 135 622 discloses the features of the preamble of claim 1.

In the prior art, the foil laminates, i.e., the foil sections with a coating and/or lamination, are heat-sealed together around their periphery forming a heat-seal around a cavity in which the sutures are contained. The process of packaging the sutures is performed in a sterile environment and the outside of the foil is sterilized as well. The secondary wrap is placed over the foil packaging to preserve the sterility of the outside of the foil packaging.

35 In use, the secondary wrap is typically opened or peeled apart by a non-sterile user such as a circulating nurse whose responsibility it is to get supplies and transfer them to a desired area, usually a sterile field in which surgery or a medical procedure is being performed. The non-sterile user transfers the contents of the secondary wrap by either flipping or dropping the contents, i.e., the foil packaged sutures, onto a sterile tray, or by passing the foil packaged sutures into the sterile field by peeling open the package, exposing and presenting the sterile foil package which a sterile user may then remove, e.g., by grasping with sterile forceps. The flipping, dropping or otherwise passing the secondary wrap contents may be referred to as "transferring." Once the foil package has been transferred into the sterile field, the sterile user may open the sterile foil package and, may grasp the suture needle with an attached suture.

40 The purpose of the secondary wrap is to enable the non-sterile user to transfer the foil packaging without touching it or otherwise compromising its sterility. It has been important for the peelable secondary packaging to have the right touch, i.e., not to require excessive force to open, so that the user has control of the transferring process, for example, to prevent the inner package component such as a tear-open foil package contained therein, from unintentionally falling out or flying away.

45 One of the reasons the packaging system using a foil package with a secondary wrap has been considered necessary is, if the foil were not sterile on the outside and were opened by a non-sterile user, unsterile foil, e.g., a torn or peeled outside edge, could come in contact with the suture holding mechanism or the suture and thereby compromise suture sterility.

50 One of the problems with the existing suture packaging is that the sterile user must open the foil package. This task can be time consuming, awkward, and inconvenient particularly in the context of surgery where a sterile user is involved in several simultaneous activities and may also be required to act quickly.

55 It is an object of the present invention to eliminate the use of foil suture packaging in the sterile field and to eliminate the secondary overwrap by providing a peelable foil suture package for transferring an immediately accessible suture into the sterile field. Another object of the invention is to reduce the amount of packaging material thus reducing the amount of medical waste material by eliminating the overwrap and using peelable foil to transfer a suture. Another

object of the invention is to provide a sterile user easy access to a suture needle and attached suture without requiring the sterile user to peel or tear open a foil package.

Existing peelable foil suture packaging does not provide adequate barrier to moisture to prevent suture degradation for a desirable suture stability and/or is not suitable for transferring sutures into a sterile field.

It is therefore another object of the invention to provide absorbable suture packaging which provides a sufficient barrier to bacteria and moisture while facilitating a relatively easy transfer into a sterile field and easy access by a user.

It is a further object of the invention to provide a peelable foil suture package for hydrophilic nylon sutures packaged under humid conditions that is capable of preventing loss of suture moisture.

It is also an object of the present invention is to provide a peelable foil which reduces the likelihood that the user may be cut by edges of the foil packaging.

## SUMMARY OF THE INVENTION

According to the present invention there is provided a suture package and an arming system comprising such a suture package as defined in the claims.

The present invention provides a peelable foil packaging system for sutures, preferably absorbable sutures, which eliminates the necessity for a secondary overwrap and eliminates the step which requires a sterile user to peel or tear open a suture package to access a suture.

The package of the present invention comprises two foil laminates. Preferably each foil laminate of the present invention comprises a metal foil section, preferably aluminum foil, having an inner lamination comprising a polymer, such as polypropylene. The two foil laminates are sealed together enclosing a suture. The sealed foil laminates are capable of preserving sterility, preventing degradation of the suture, and maintaining suture stability by providing a sufficient barrier to moisture, oxygen and bacteria.

A laminate as used herein refers to a foil having a coating applied directly to at least one surface of a metal foil or a coating applied to at least one surface of the foil using an adhesive. A lamination is the coating applied to the foil either directly or using an adhesive. To laminate as used herein means to apply a coating directly or using an adhesive.

In one embodiment a first foil section is laminated with a first polymer coating comprising an extrusion coated polymer and a second foil section is laminated with a polymer coating comprising a solvent based coated polymer. The polymer coatings of the laminates are sealable together, for example, by heat sealing or gluing. A heat sealable polymer coating is capable of forming a seal with another polymer coating when heated. Preferably, the laminates are heat-sealed together. The sealed polymer coatings of the first and second foil sections permit the foil sections to be peeled, i.e., separated, from each other. When the package is peeled, one of the coatings may separate from the foil to which it was laminated while adhering or remaining integral with the other polymer coating. The peeling may also occur in other ways, for example, the polymer coatings may separate from each other.

Two non-sealed flaps at one end of the package, one for each section of foil, may be used to peel the package open.

In a preferred embodiment of this invention, the polymer coatings for the first and second foil sections comprise polypropylene. The polypropylene is laminated on the second foil section using a dispersion coating method. The polypropylene laminated sides of the pieces of foil are heat sealed together to effect a seal substantially impervious to bacteria, water and oxygen.

Preferably the suture contained in the foil packaging is attached to a suture needle, and is wound in a suture holding mechanism which presents the needle for quick, easy grasping. An example of such suture holding mechanism is described in EP-A-608145. Each of the two foil sections may be peeled, i.e., separated from the other, to transfer the sterile contents into a sterile field without touching or otherwise compromising the suture's sterility.

The seal strength of the package, i.e., the force per inch of seal width required to peel the package open, is sufficiently low so as to permit the user to have effective control in the transferring of the suture from the package. And, the seal strength is high enough to maintain control in the use of the package, to maintain package integrity and to minimize the risk of the package opening, particularly in transportation and handling.

Another feature of a preferred embodiment of the invention is an outer lamination comprising a polymer coating adhered to the foil with an adhesive, wherein the outer lamination and adhesive provide a "soft feel" to the package. The outer coating helps to prevent the package from cutting or scratching the user and can serve to minimize cracking and microbreaks, particularly if the packaging is mishandled. The flexibility of the package, the thickness of the foil or the coatings, or the adhesive selected to adhere the coating to the foil may effect the soft feel of the package.

Another feature of the preferred embodiment provides for a package with rounded corners to minimize cutting by the package.

The package of the present invention also may be used to package nylon sutures which are pre-moistened and packaged under humid conditions to maintain suture pliability.

## DETAILED DESCRIPTION OF THE DRAWINGS

Figures 1A, 1B and 1C illustrate the opening of a package of the present invention and transferring a suture holding mechanism contained therein.

Fig. 2 is a plan view of a partially peeled foil package of the present invention containing a suture in a suture holding mechanism.

Fig. 3 is a partial outside view and a partial cross sectional view of the peelable foil package of the present invention containing a suture in a suture holding mechanism.

Fig. 4 is a cross sectional view taken along lines 4-4 of Fig. 3.

Figs. 5A and 5B are enlarged cross sectional views of Fig. 3 taken along lines 5A-5A and 5B-5B, respectively.

Fig. 6 is a plan view of a suture holding mechanism.

Fig. 7 is a top plan view of the suture holding mechanism depicted in Fig. 6 in a sleeve.

Fig. 8 is a graph representing a 24-week suture stability study.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Figures 1-5, there is illustrated a package 10 in accordance with the present invention. The package 10 comprises a top foil laminate 11 and a bottom foil laminate 12. The package 10 is generally rectangular in shape to accommodate a suture holding mechanism 15 containing an absorbable suture 20 attached to a needle 21. The package 10 has rounded corners 16 to minimize sharp edges. Other shapes may be used as well.

A heat seal 14 is formed around one side 49 of the top laminate 11 and around one side 50 of the bottom laminate 12. The laminates 11 and 12 are sealed together at the heat seal 14. The suture holding mechanism 15 is packaged in a cavity 13 and is enclosed within the periphery of the heat seal 14 and between the laminates 11 and 12. The top 11 and bottom 12 laminates each additionally comprise a flap 17 and 18 respectively, extending from the heat seal 14 periphery to an end 19 of the package. The flaps 17, 18 are not heat sealed together and provide a gripping area with which the flaps can be used to peel apart the foil sections to open the package 10 and transfer the suture holding mechanism 15 into a sterile field of use.

Figs. 1A-C illustrate the package 10 in use. The flaps 17 and 18 are grasped to peel open the heat seal 14 starting at the end 19. (Fig. 1A) The package 10 is opened in a direction away from the end 19 and generally in the direction of the line AB. The flaps 17, 18 are peeled apart and away from each other to expose the suture holding mechanism 15 (Fig. 1B) while contact with the suture holding mechanism 15 is avoided. The suture holding mechanism 15 may then be transferred easily out of the opened package end by grasping the exposed suture holding mechanism, e.g., with sterile forceps (Fig. 1B) or by flipping or dropping the suture holding mechanism 15 from the foil package 10 (Fig. 1C) without contacting the suture holding mechanism 15 or the suture 20. The suture holding mechanism has labeling information 60 for the sterile user to identify the suture 20 contained therein.

Referring to Figs. 5A and 5B, there are illustrated enlarged cross sections along lines 5A-5A and 5B-5B of Fig. 3. Fig. 5A illustrates unsealed foil laminates. 5B illustrates sealed foil laminates as they are being peeled apart from each other. The top laminate 11 and bottom laminate 12 each comprise a metal foil section 41 and 42 respectively. The foil sections preferably comprise aluminum foil, however other metal foils are known in the art and may be used. The foil sections 41 and 42 are sufficiently thick such that when coated with a suitable polymer, they act as a barrier to moisture and oxygen and thereby prevent suture degradation. The foil sections are also sufficiently thin to provide a flexible packaging with an appropriate feel and user control when handling or opening. Ideally the foil thickness is from about 0.018 mm to about 0.05 mm (0.7 mil to about 2.0 mils) and preferably from 0.025 mm to 0.038 mm (1 mil to 1.5 mils) (1 mil is equal to .001 inch).

The foil section 41 is laminated on one side 49 with a polymer coating 43 and the foil section 42 is laminated on one side 50 with a polymer coating 44. The coating 43 and the coating 44 are heated at a temperature high enough to provide a seal sufficiently impervious to moisture and oxygen and low enough to avoid disturbing the integrity of the suture material. The preferred heat sealing temperature range is from 104°C to 202°C (220°F to 395°F).

Polymer laminations for foils are well known in the art. Suitable peelable foil laminates may include, for example, laminations based on polypropylene, polyester, polyethylene, and a co-polymer of polyethylene and vinyl acetate. In a preferred embodiment, the coating 43 comprises polypropylene, which is laminated onto the foil 41 using an extrusion coating method and the coating 44 comprises polypropylene which is laminated onto foil 42 using a solvent based coating method. Extrusion and solvent based methods of coating foil are well known in the art. A solvent based coating method includes solution coating methods and dispersion coating methods. In a preferred embodiment, a dispersion coating method is used. The coatings may be reversed, i.e. the top section may be coated using a solvent based coating method and the bottom section may be coated using an extrusion coating method.

Referring to Fig. 5B, as the package is peeled, i.e., the foil sections are separated, the coating 44 continues to adhere to the coating 43 by virtue of the heat sealing. The coating 44 is peelable, i.e., it at least partially separates from the foil section 42 to which it was laminated. The peel or separation of the foil sections may be affected by other means,

for example, the polymer coatings may separate from each other.

It is desirable to keep the cavity 13 as small as possible so that the suture holding mechanism 15 fits snugly into the cavity 13. A snug fit allows greater control in opening the package 10. It is preferred, especially with heat sensitive sutures, that the heat sealing be spaced a distance away from the cavity 13.

The ability of a package to keep out moisture can be expressed as a function of the stability of sutures contained in the package under controlled environmental conditions. Stability tests are well known in the art. One measure of suture stability is breaking strength at varying time intervals under controlled conditions. Fig. 8 illustrates the results of a 24 week accelerated stability study of various foil laminates using a 12 day in vitro breaking strength test as described in Example 1 below.

#### EXAMPLE 1

A six month (24 week) accelerated stability study was conducted. VICRYL™ absorbable sutures were wound in polypropylene rather than paper folders to eliminate potential distribution of moisture between suture and folder. The sutures were packaged in peelable foil single overwraps and kept under accelerated environmental conditions of 50°C and 80% relative humidity. Every two weeks suture stability was evaluated using a 12 day in vitro test. In the 12 day in vitro test the sutures are submerged in a buffered water bath at 40.9°C + or - 0.1°C for twelve days. The 12 day in vitro test attempts to replicate what the results of a 21 day in vivo test would be. Using an Instron (registered Trade Mark) Test Instrument, the breaking tensile strength was measured for sutures packaged in foils labeled A-F. Foils A-D and F are peelable foils. Using infrared spectrographic analyses, the composition of the tested foils were determined to be as follows:

Foil A Primarily polyester with silica based filler on surface.

Foil B Multilaminate  
aluminum layer with polyester-polyethylene polyethylene/vinyl acetate/acrylic acid stearate  
peelable coating (outermost) (tripolymer of polyethylene/vinyl acetate/ acrylic acid with stearate additive)

Foil C Top and bottom - polyethylene with butadiene/styrene type additive

Foil D Top - polyethylene with amide species  
Bottom - Ethylene-co-vinyl acetate with amide species

Foil E Vinyl heat seal coating applied using a solvent solution coating method

Foil F Top - polypropylene  
Bottom - polypropylene

The seal between the coating 43 and coating 44, in addition to being sufficiently impervious to moisture and oxygen, permits peeling of the sections 11 and 12 from one another.

The seal strength of the package, i.e., the force per m (inch) of seal width required to peel the package open is sufficient to enable an average user enough control in opening the package 10 to transfer the suture holding mechanism into a sterile field. A seal strength of about 35.7 kg per m (2 pounds per inch) of seal width or less is preferred. Also, the seal strength is preferably high enough to maintain effective control in transferring the package, to maintain package integrity and to minimize the risk of the package opening, particularly in transportation and handling. Ideally the seal strength is no less than about 0.6 pounds per inch of seal width. Seal strength may be determined as described in Example 2 below.

#### EXAMPLE 2

Seal strength data is taken from a Model #1401 Instron (registered Trade Mark) using a 4.5 kg (10 lb) load cell, 0-4.5 kg (0-10 lb.) full scale. One inch wide seals are tested or half inch wide seals are tested and the resulting values doubled. Two sealed surfaces are separated and the force applied is recorded as a curve on an Instron chart. The Instron curve for peelable foil is ideally rectangular in shape. The seal strength is determined by the value at the plateau of the curve. A seal strength value may be derived from the chart by drawing a perpendicular line from the midpoint of the distance from the start and the end of the curve. A horizontal line is extended at the top of the curve from the point where the perpendicular line intersects the curve. An average of the values above and below the horizontal line may then be used to determine seal strength. The seal strength was determined for 10 samples of polypropylene coated foil sections which had been heat sealed together. The first foil section was laminated using an extrusion coating method

and the second section was laminated using a solvent based coating method. The measured seal strength values in terms of kg per m (pounds per inch) of seal width were 16, 17, 16.8, 15.2, 15.7, 15.2, 16, 16, 18.2 (0.90, 0.95, 0.94, 0.85, 0.88, 0.85, 0.90, 0.90, 1.02). The average seal strength was 16 kg per m (0.90 pounds per inch) of seal width.

The foil sections 41 and 42 have an outer layer of adhesive 45 and 46 respectively. The adhesive layers 45 and 46 may comprise a solvent or solventless based adhesive. The adhesive layers 45 and 46, preferably comprised a solvent based adhesive or a hot melt adhesive, and most preferably, a urethane based or an extrusion laminated adhesive. The adhesive layer 45 and 46 each adhere an outer coating 47 and 48 respectively to the foil sheet 41 and 42 respectively.

The outer coatings 47 and 48 are preferably comprised of polypropylene about 0.006 mm (.25 mil) to about 0.025 mm (1 mil) thick. In other preferred embodiments, the outer coating 47 or the outer coating 48 may comprise polyethylene, polyester or nylon.

The flexibility of the foil package can be described in terms of its stiffness characteristics. In a preferred embodiment the package stiffness is no more than 196 mm-g (.017 inch-pounds) for a single foil laminate and is preferably from about 92 mm-g (.008 inch-pounds) to 173 mm-g (.015 inch-pounds) for each foil laminate. Package flexibility is intended to provide a softer feel to the user, minimize microbreaks in package from mishandling, and optimize control in use of the package. Package flexibility or stiffness may be determined as described in Example 3 below.

### EXAMPLE 3

A model #1003 Tinius Olsen (registered Trade Mark) stiffness tester was used. Samples one inch by four inches were cut, folded over and heat sealed together to form a 25.4 mm (1 inch) by 50.8 mm (two inches) sample. A sample was placed on the tester, clamping a portion of the sample while the remaining portion is placed on a moveable platform having a polished surface measuring 12.7 mm (1/2 inch) by 19.8 mm (25/32 inches) long. The moveable platform is connected to a pointer. As the clamped portion is rotated to a 45° angle, the moveable portion resists the movement causing the pointer to register a value. The pointer indicates a percent value of 1152 mm-g (0.10 inch-lbs). The measured stiffness values for a sample were averaged and then divided by two to give the stiffness of a single layer of foil laminate. The machine direction and the cross direction, i.e., perpendicular to the machine direction, were measured for each sample because stiffness may vary somewhat depending on the direction of testing.

Samples of two preferred peelable foils were tested. Samples A and B each comprised a top and bottom foil laminate. The top foil laminate had a polypropylene coating with a thickness of 4.5 kg/ream  $\pm$  0.45 kg (10 pounds/ream  $\pm$  1.0 pounds), applied to a 0.038 mm (1.5 mil) thick aluminum foil section using an extrusion coating method. The bottom foil had a polypropylene coating having a thickness of 0.64 kg/ream  $\pm$  0.009 kg (1.4 pounds/ream  $\pm$  .02 pounds), applied to a 0.038 mm (1.5 mil) thick aluminum foil section using a solvent based coating method. The outer coating for each section comprised a 50 ga. thick layer of polypropylene adhered with an adhesive to the foil section. The adhesive for Sample A was a solvent applied urethane based adhesive and the adhesive for Sample B was an extrusion applied ethylene acrylic acid adhesive.

The following measurements were recorded:

TABLE I

	A Top Section		A Bottom Section		B Top Section		B Bottom Section	
	Machine	Cross	Machine	Cross	Machine	Cross	Machine	Cross
	19	20	16	16	25	27	20	20
	19	21	16	16	26	28	20	20
	19	20	16	17	27	28	20	21
	20	20	16	16	27	27	19	20
	20	21	16	16	25	28	19	21
	20	20	16	16	26	27	20	21
Average	20%	20%	16%	16%	26%	28%	20%	21%
x 0.1	.020	.020	.016	.016	.026	.028	.020	.021
÷ 2 = stiffness	.010	.010	.008	.008	.013	.014	.010	.014

The suture 20 described with respect to Figs. 1-5 is packaged in a suture holding mechanism which contains the suture and presents it for removal. A suitable suture holding mechanism is depicted in Figs. 6 and 7. The suture holding

mechanism 15 has a flat bottom section 22 with holding means 23 for one or more sutures 20 disposed around the periphery of the flat bottom section 22. The holding mechanism 15 comprises a first upwardly extending wall 24 disposed at the periphery of the flat bottom section and a second upwardly extending wall 25 disposed inwardly from the outer periphery of the holding mechanism. Spaced around the periphery are a plurality of hinged door members 26. A channel 27 is formed by the outside of the flat bottom section 22, and the inwardly spaced wall 25. The hinged door member 26 may be folded over on top of the suture 20 and locked in place. Also disposed at one end of the flat bottom section 22 is a third upwardly extending wall 28 having a plurality of cut out areas 29 for the needle 21 as shown. In practice, the suture 20 is wound about the outer periphery and in the channel 27 as previously described and the needle 21 is then placed appropriately with a portion of it being held by one of the cut out areas 29 in the third upwardly extending wall 28. Disposed beneath the needle 21 is a deflectable portion 30. The deflectable portion 30 is formed by a cut 31 in the bottom section 22 so that the deflectable portion 30 underlies the needle.

As shown in Figure 7, the suture holding mechanism 15 depicted in Fig. 6 is encased or enclosed in a protective sleeve 32. The sleeve 32 may be made from Kraft (registered Trade Mark) sulfate board or similar material. The sleeve 32 overlies the top of the suture holding mechanism 15 but has a cutout at one end thereof to expose the needle 21. The sleeve may have labeling information 60 printed on it. The bottom of the sleeve includes a deflectable portion formed by a cut in the bottom of the sleeve (not shown). The deflectable portion of the sleeve is aligned with and is slightly larger than the deflectable portion 30 of the suture holding mechanism 15.

It is a simple matter when the user desires to extract the needle and suture from the package to grasp the needle with forceps. Because the area underlying the needle is deflectable, the forceps can be placed as deep as desired on the needle so that the needle only needs to be grasped once by the forceps and the needle and suture removed from the package, ready for use. Because the deflectable portion of the sleeve is slightly larger, it will prevent inadvertent dislodgement of the needle should the user happen to place a finger on the deflectable portion on the sleeve, it will not deflect the deflectable portion of the suture holder. Hence, the deflectable portions of both the suture holder and the sleeve only deflect in one direction. While the suture holding mechanism has been described with regard to Figs. 6 and 7, other suture holding mechanisms can be used.

The peelable foil package and the suture holding mechanism together provide a one step, no touch suture and needle arming system for a sterile user. In use, a non sterile user will select a foil package containing a suture holding mechanism, peel open the package and transfer the suture holding mechanism into a sterile field. The suture holding mechanism will be labeled so a sterile user can determine if the suture is appropriate. The cut out portion of the sleeve 32 exposes at least a portion of the needle so that the needle is accessible and will be readily grasped without having to tear or remove any of the protective sleeve. Thus, a sterile user can then grasp a suture needle and remove the suture without having to peel open a foil over wrap and without having to touch the needle.

In a preferred embodiment the suture holding mechanism presents the needle so that it may easily be grasped by forceps or a needle holder used to hold a suture needle while suturing. The forceps or needle holder can deflect the bottom of the suture holding mechanism and its sleeve in one direction and obtain a good "bite" or grasp on the needle.

The invention described and the specific details and the manner in which it may be carried out having been exemplified it will be readily apparent to those skilled in the art that innumerable variations, modifications, and extensions of the basic principles involved may be made without departing from the scope of the present invention.

## Claims

### 1. A suture package (10) comprising:

a first laminate (11) comprising a first foil section (41) laminated on a first side (49) with a first polymer coating (43) to form a material substantially impervious to moisture; and

a second laminate (12) comprising a second foil section (42) laminated on a first side (50) with a second polymer coating (44) to form a material substantially impervious to moisture;

wherein a second side of said first laminate (11) and a second side of said second laminate (12) are sealed together to form a substantially moisture impervious seal (14) and enclose a suture (20) between the first laminate (11) and the second laminate (12) and within the seal (14);

wherein the first foil section (41) and the second foil section (42) each comprise a flap (17, 18) for grasping the package (10) to peel said first foil section (41) and said second foil section (42) from each other; and

wherein said package (10) may be opened to enable transferring of the suture (20) to a desired area, characterised in that said first polymer coating (43) comprises an extrusion coated polymer; and said second polymer coating (44) comprises a solvent based coated polymer.

### 2. The suture package (10) of claim 1, wherein the seal (14) has a seal strength of between 10.7 and 35.7 kg per m (0.6 and 2 pounds per inch) of seal width.

3. The suture package (10) of claim 1 or claim 2, wherein the thickness of the foil sections (41,42) is between 0.018mm and 0.05mm (0.7 and 2.0 mils).
- 5 4. The suture package (10) of claim 3, wherein the thickness of the foil sections (41,42) is between 0.025mm and 0.038mm (1 and 1.5mil).
6. The suture package (10) of any preceding claim, wherein the foil comprises aluminium.
- 10 6. The suture package (10) of any preceding claim,  
wherein the first polymer coating (43) and second polymer coating (44) are heat-sealable polymers, and  
wherein said first laminate (11) and said second laminate (12) are heat sealed together.
7. The suture package (10) of claim 6, wherein the first polymer coating (43) and second polymer coating (44) each  
15 comprise polypropylene.
8. The suture package (10) of claim 6, wherein the first polymer coating (43) comprises polyethylene.
9. The suture package (10) of claim 6, wherein the first polymer coating (43) comprises a copolymer of polyethylene  
20 and vinyl acetate.
10. The suture package (10) of claim 6, wherein the heat seal is formed at a temperature between 104°C (220°F) and 202°C (395°F).
- 25 11. The suture package (10) of claim 6, wherein the second polymer coating (44) is peelable from the second foil section (42) when the second polymer coating (44) is heat sealed with the first polymer coating (43).
12. The suture package (10) of claim 1, wherein the solvent based coated polymer is a dispersion coated polymer.
13. The suture package (10) of any preceding claim, wherein said package has rounded corners (16).
- 30 14. The suture package (10) of any preceding claim, wherein the suture (20) is an absorbable suture.
15. The suture package (10) of any of claims 1 to 13, wherein the suture (20) comprises a pre-moistened hydrophillic  
35 nylon material.
16. The suture package (10) of any preceding claim, wherein the enclosed suture (20) is attached to a needle (21) and  
is packaged in a suture holding mechanism (15); and  
wherein the suture holding mechanism (15) comprises a bottom section (22) having a plane, and means  
40 (23) disposed on one side of said bottom section (22) for holding the suture (20) and displaying the needle (21) on  
said side, a portion (30) of said bottom section (22) underlying said needle (21) being deflectable out of the plane  
of said bottom section (22).
17. The suture package (10) of claim 16, wherein the suture holding mechanism (15) further comprises a protective  
45 sleeve member (32) enclosing said suture holding mechanism (15), said sleeve (32) having a top, bottom, and two  
longitudinal sides connecting said top and bottom, said bottom (22) having a deflectable portion underlying the  
deflectable portion (30) of said suture holding mechanism (15).
18. The suture package (10) of claim 17, wherein the protective sleeve member (32) has a cut out portion on the top of  
50 said protective sleeve (32) for exposing said needle (21) on said suture holding mechanism (15).
19. The suture package (10) of claim 17, wherein the deflectable portion on the protective sleeve member (32) is larger  
than the deflectable portion (30) on said suture holding mechanism (15).
- 55 20. The suture package (10) of any preceding claim, wherein at least one of said first foil section (41) and said second  
foil section (42) have an outer layer of an adhesive material (45, 46) adhering an outer coating to said at least one  
of said first foil section (41) and said second foil section (42).
21. The suture package (10) of claim 20, wherein the adhesive material comprises a urethane based material.



22. The suture package (10) of claim 20, wherein the adhesive material comprises a hot melt adhesive.
23. The suture package (10) of any of claims 20 to 22, wherein the outer coating comprises polypropylene.
- 5 24. The suture package (10) of any of claims 20 to 22, wherein the outer coating comprises polyethylene.
25. The suture package (10) of claim 24, wherein the outer coating further comprises polyester and nylon.
- 10 26. The suture package (10) of any of claims 20 to 25, wherein the outer coating is from 0.006mm to 0.025mm (.25 mil to 1 mil) thick.
27. The suture package (10) of any preceding claim, wherein the stiffness of each of the first foil laminate (41) and the second foil laminate (42) is not greater than 196mm.g (.017 inch pounds).
- 15 28. A suture arming system comprising a suture package (10) as claimed in any one of the preceding claims sufficiently moisture impervious for storage of moisture sensitive absorbable sutures (20), and
- a sterile suture holding mechanism (15),
- wherein said package (10) is peelable to enable a non-sterile user to peel said package (10) open so
- 20 that said sterile suture holding mechanism (15) can be transferred by the non-sterile user from a non-sterile area to a sterile area;
- wherein the sterile suture holding mechanism (15) includes a displayed suture needle (21) with an attached suture (20), said suture holding mechanism (15) capable of being separated from said package (10) when transferred to the sterile field, and said suture needle (21) being immediately accessible to a sterile user
- 25 for arming a needle holder when said suture holding mechanism (15) is separated from the suture package (10) into the sterile field.
29. The suture system of claim 28, wherein said suture holding mechanism (15) comprises:
- 30 a flat bottom section (22) having a plane, and means (23) disposed on one side of said bottom section (22) for holding the suture (20) and displaying the needle (21) on said side, a portion (30) of said flat bottom (22) underlying said needle (21) being deflectable out of the plane of said flat bottom section (22), and
- a protective sleeve member (32) enclosing said suture holding mechanism (15), said sleeve (32) having a top, bottom, and two longitudinal sides connecting said top and bottom, said bottom having a deflectable portion
- 35 underlying the deflectable portion (30) of said suture holding mechanism (15).
30. The suture system of claim 29, wherein said protective sleeve (32) is labelled to identify the suture (20) contained in the suture holding mechanism (15).
- 40 31. The suture system of claim 29 or claim 30, wherein the protective sleeve member (32) has a cut out portion on the top of said protective sleeve (32) for exposing said needle (21) on said suture holding mechanism (15).
32. The suture system of any of claims 29 to 31, wherein the deflectable portion on the protective sleeve member (32) is larger than the deflectable portion (30) on the suture holding mechanism (15).

## Patentansprüche

### 1. Verpackung (10) für Nahtmaterial umfassend:

50 ein erstes Laminat (11) mit einem ersten Folienteil (41), das auf einer ersten Seite (49) mit einer ersten Polymerschicht (43) laminiert ist, um ein im wesentlichen feuchtigkeitsundurchlässiges Material zu bilden; und ein zweites Laminat (12) mit einem zweiten Folienteil (42), das auf einer ersten Seite (50) mit einer zweiten Polymerschicht (44) laminiert ist, um ein im wesentlichen feuchtigkeitsundurchlässiges Material zu bilden;

55 wobei eine zweite Seite des ersten Laminates (11) und eine zweite Seite des zweiten Laminates (12) dicht miteinander verbunden sind, um eine im wesentlichen feuchtigkeitsundurchlässige dichte Verbindung (14) zu bilden und ein Nahtmaterial (20) zwischen dem ersten Laminat (11) und dem zweiten Laminat (12) innerhalb der dichten Verbindung (14) einzuschließen;

wobei das erste Folienteil (41) und das zweite Folienteil (42) jeweils eine Lasche (17, 18) zum Erfassen der Verpackung (10) aufweisen, um das erste Folienteil (41) und das zweite Folienteil (42) voneinander abzu-

ziehen und

wobei die Verpackung (10) geöffnet werden kann, um die Übergabe des Nahtmaterials (20) in einen gewünschten Bereich zu ermöglichen,

dadurch gekennzeichnet, daß die erste Polymerschicht (43) ein extrusionsbeschichtetes Polymer und die zweite Polymerschicht (44) ein Lösungsmittelbeschichtetes Polymer enthält.

2. Verpackung (10) für Nahtmaterial nach Anspruch 1, bei welcher die dichte Verbindung (14) eine Festigkeit der dichten Verbindung von 10,7 bis 35,7 kp pro m (0,6 bis 2 Pfund pro Zoll) derselben hat.

3. Verpackung (10) für Nahtmaterial nach Anspruch 1 oder 2, bei welcher die Dicke der Folienteile (41, 42) zwischen 0,018 und 0,05 mm (0,7 bis 2,0 Tausendstel Zoll) liegt.

4. Verpackung (10) für Nahtmaterial nach Anspruch 3, bei welcher die Dicke der Folienteile (41, 42) zwischen 0,025 und 0,038 mm (1 bis 1,5 Tausendstel Zoll) liegt.

5. Verpackung (10) für Nahtmaterial nach einem der bisherigen Ansprüche, bei welcher die Folie aus Aluminium besteht.

6. Verpackung (10) für Nahtmaterial nach einem der bisherigen Ansprüche, bei welcher die erste Polymerschicht (43) und zweite Polymerschicht (44) durch Wärme dicht verbindbare Polymere sind, und bei welcher das erste Laminat (11) und das zweite Laminat (12) durch Wärme dicht miteinander verbunden sind.

7. Verpackung (10) für Nahtmaterial nach Anspruch 6, bei welcher die erste Polymerschicht (43) und die zweite Polymerschicht (44) jeweils Polypropylen enthalten.

8. Verpackung (10) für Nahtmaterial nach Anspruch 6, bei welcher die erste Polymerschicht (43) Polyethylen enthält.

9. Verpackung (10) für Nahtmaterial nach Anspruch 6, bei welcher die erste Polymerschicht (43) ein Copolymer von Polyethylen und Vinylacetat enthält.

10. Verpackung (10) für Nahtmaterial nach Anspruch 6, bei welcher die dichte Verbindung mittels Wärme bei einer Temperatur zwischen 104 °C (220 °F) und 202 °C (395 °F) erfolgt.

11. Verpackung (10) für Nahtmaterial nach Anspruch 6, bei welcher die zweite Polymerschicht (44) vom zweiten Folienteil (42) abziehbar ist, wenn die zweite Polymerschicht (44) mittels Wärme mit der ersten Polymerschicht (43) dicht verbunden ist.

12. Verpackung (10) für Nahtmaterial nach Anspruch 1, bei welcher das Lösungsmittelbeschichtete Polymer ein Dispersionsbeschichtetes Polymer ist.

13. Verpackung (10) für Nahtmaterial nach einem der vorhergehenden Ansprüche, bei welcher dieselbe abgerundete Ecken (16) hat.

14. Verpackung (10) für Nahtmaterial nach einem der vorhergehenden Ansprüche, bei welcher das Nahtmaterial (20) ein absorbierbares Nahtmaterial ist.

15. Verpackung (10) für Nahtmaterial nach einem der Ansprüche 1 bis 13, bei welcher das Nahtmaterial (20) ein vorangefeuchtetes hydrophiles Nylonmaterial ist.

16. Verpackung (10) für Nahtmaterial nach einem der vorhergehenden Ansprüche, bei welcher das eingeschlossene Nahtmaterial (20) mit einer Nadel (21) verbunden sowie in einer Nahtmaterial-Haltevorrichtung (15) verpackt ist; und

bei welcher die Nahtmaterial-Haltevorrichtung (15) einen Bodenbereich (22) mit einem ebenen Teil sowie eine an einer Seite des Bodenbereiches (22) angeordnete Einrichtung (23) zum Halten des Nahtmaterials (20) und zum Sichtbarmachen der Nadel (21) auf dieser Seite aufweist, wobei ein unter der Nadel (21) liegender Teil (30) des Bodenbereiches (22) aus der Ebene des Bodenbereiches (22) herausbiegbar ist.

17. Verpackung (10) für Nahtmaterial nach Anspruch 16, bei welcher die Nahtmaterial-Haltevorrichtung (15) weiterhin eine Schutzhülle (32) aufweist, welche die Nahtmaterial-Haltevorrichtung (15) einschließt und diese Hülse aus einem Deckel, einem Boden sowie zwei Deckel und Boden verbindenden Längsseitenwänden besteht, wobei der Boden (22) einen herausbiegbaren Teil aufweist, der unter dem herausbiegbaren Teil (30) der Nahtmaterial-Haltevorrichtung (15) liegt.
18. Verpackung (10) für Nahtmaterial nach Anspruch 17, bei welcher die Schutzhülle (32) an ihrer Oberseite einen ausgeschnittenen Bereich aufweist, um die Nadel (21) und die Nahtmaterial-Haltevorrichtung (15) freizulegen.
19. Verpackung (10) für Nahtmaterial nach Anspruch 17, bei welcher der herausbiegbare Teil der Schutzhülle (32) größer ist als der herausbiegbare Teil (30) der Nahtmaterial-Haltevorrichtung (15).
20. Verpackung (10) für Nahtmaterial nach einem der vorhergehenden Ansprüche, bei welcher vom ersten Folienteil (41) und zweiten Folienteil (42) mindestens eine Außenschicht (45, 46) aus Klebstoff hat, die an der Außenseite mindestens eines des ersten Folienteils (41) und des zweiten Folienteils (42) haftet.
21. Verpackung (10) für Nahtmaterial nach Anspruch 20, bei welcher der Klebstoff ein Material auf Urethanbasis enthält.
22. Verpackung (10) für Nahtmaterial nach Anspruch 20, bei welcher der Klebstoff einen Heißschmelzkleber enthält.
23. Verpackung (10) für Nahtmaterial nach einem der Ansprüche 20 bis 22, bei welcher die Außenschicht Polypropylen enthält.
24. Verpackung (10) für Nahtmaterial nach einem der Ansprüche 20 bis 22, bei welcher die Außenschicht Polyethylen enthält.
25. Verpackung (10) für Nahtmaterial nach Anspruch 24, bei welcher die Außenschicht weiterhin Polyester und Nylon enthält.
26. Verpackung (10) für Nahtmaterial nach einem der Ansprüche 20 bis 25, bei welcher die Außenschicht von 0,006 bis 0,025 mm (0,25 bis 1 Tausendstel Zoll) dick ist.
27. Verpackung (10) für Nahtmaterial nach einem der vorhergehenden Ansprüche, bei welcher die Steifigkeit sowohl des ersten Folienlaminates (41) als auch des zweiten Folienlaminates (42) nicht größer ist 196 mm • g (0,017 Zoll Pfund).
28. Nahtmaterial-Verwendungssystem mit einer Verpackung (10) für Nahtmaterial nach einem der vorhergehenden Ansprüche, welche ausreichend feuchtigkeitsundurchlässig für die Aufbewahrung feuchtigkeitsempfindlicher, absorbierbarer Nahtmaterialien (20) ist und
- eine sterile Nahtmaterial-Haltevorrichtung (15) aufweist,
- bei welchem die Verpackung (10) abziehbar ist, um es einem nicht sterilen Benutzer zu ermöglichen, dies Verpackung durch Abziehen zu öffnen, so daß die sterile Nahtmaterial-Haltevorrichtung (15) vom nicht sterilen Benutzer aus einem nicht sterilen Bereich in einen sterilen Bereich übergeben werden kann;
- bei welchem die sterile Nahtmaterial-Haltevorrichtung (15) eine sichtbare Nahtmaterial-Nadel (21) mit angebrachtem Nahtmaterial (20) aufweist, die Nahtmaterial-Haltevorrichtung (15) von der Verpackung (10) getrennt werden kann, wenn sie in den sterilen Bereich übergeben wird, und die Nahtmaterial-Nadel (21) unmittelbar danach für einen sterilen Benutzer zur Verwendung eines Nadelhalters erfaßbar ist, wenn die Nahtmaterial-Haltevorrichtung (15) von der Verpackung (10) für Nahtmaterial getrennt und in den sterilen Bereich übergeben wird.
29. Nahtmaterial-System nach Anspruch 28, bei welchem die Nahtmaterial-Haltevorrichtung (15) umfaßt:
- einen flachen Bodenbereich (22) mit einem ebenen Teil sowie einer an einer Seite des Bodenbereiches (22) angeordneten Einrichtung (23) zum Halten des Nahtmaterials (20) und zum Sichtbarmachen der Nadel (21) auf dieser Seite, einem unter der Nadel (21) liegenden Teil des flachen Bodens (22), der aus der Ebene des flachen Bodenbereiches (22) herausbiegbar ist, und
- eine Schutzhülle (32), welche die Nahtmaterial-Haltevorrichtung (15) einschließt, wobei diese Hülle (32) aus

einem Deckel, einem Boden sowie zwei Deckel und Boden verbindenden Längsseitenwänden besteht und der Boden einen herausbiegbaren Teil aufweist, der unter dem herausbiegbaren Teil (30) der Nahtmaterial-Haltevorrichtung (15) liegt.

- 5 **30.** Nahtmaterial-System nach Anspruch 29, bei welchem die Schutzhülle (32) etikettiert ist, um das in der Nahtmaterial-Haltevorrichtung (15) enthaltene Nahtmaterial (20) zu identifizieren.
- 31.** Nahtmaterial-System nach Anspruch 29 oder 30, bei welchem die Schutzhülle (32) an ihrer Oberseite einen ausgeschnittenen Bereich aufweist, um die Nadel (21) auf der Nahtmaterial-Haltevorrichtung (15) sichtbar zu machen.
- 10 **32.** Nahtmaterial-System nach einem der Ansprüche 29 bis 31, bei welchem der herausbiegbare Teil an der Schutzhülle (32) größer ist als der herausbiegbare Teil (30) an der Nahtmaterial-Haltevorrichtung (15).

## Revendications

- 15 **1.** Empaquetage pour sutures (10) comprenant :
- un premier stratifié (11) comprenant une première partie de feuille (41) stratifiée sur un premier côté (49) avec un premier revêtement de polymère (43) pour former un matériau pratiquement imperméable à l'humidité ; et
- 20 un second stratifié (12) comprenant une seconde partie de feuille (42) stratifiée sur un premier côté (50) avec un second revêtement de polymère (44) pour former un matériau pratiquement imperméable à l'humidité ;
- dans lequel un second côté dudit premier stratifié (11) et un second côté dudit second stratifié (12) sont soudés ensemble pour former un joint pratiquement imperméable à l'humidité (14) et enferment une suture (20) entre le premier stratifié (11) et le second stratifié (12) et à l'intérieur du joint (14) ;
- 25 dans lequel la première partie de feuille (41) et la seconde partie de feuille (42) comprennent chacune une patte (17, 18) pour saisir l'empaquetage (10) afin de séparer ladite première partie de feuille (41) et ladite seconde partie de feuille (42) l'une de l'autre ; et
- dans lequel ledit empaquetage (10) peut être ouvert pour permettre le transfert de la suture (20) vers une zone souhaitée,
- 30 caractérisé en ce que ledit premier revêtement de polymère (43) est constitué d'un polymère étendu par extrusion ; et
- ledit second revêtement de polymère (44) est composé d'un polymère étendu à base de solvant.
- 2.** Empaquetage pour sutures (10) de la revendication 1, dans lequel le joint (14) a une résistance mécanique de joint
- 35 entre 10,7 et 35,7 kg par mètre (0,6 et 2 livres par pouce) de largeur de joint.
- 3.** Empaquetage pour sutures (10) de la revendication 1 ou de la revendication 2, dans lequel l'épaisseur des parties de feuille (41, 42) est entre 0,018 mm et 0,05 mm (0,7 et 2 mils).
- 40 **4.** Empaquetage pour sutures (10) de la revendication 3, dans lequel l'épaisseur des parties de feuille (41, 42) est entre 0,025 mm et 0,038 mm (1 et 1,5 mils).
- 5.** Empaquetage pour sutures (10) de l'une quelconque des revendications précédentes, dans lequel ladite feuille est composé d'aluminium.
- 45 **6.** Empaquetage pour sutures (10) de l'une quelconque des revendications précédentes,
- dans lequel le premier revêtement de polymère (43) et le second revêtement de polymère (44) sont à base de polymères pouvant être thermosoudés, et
- dans lequel ledit premier stratifié (11) et ledit second stratifié (12) sont thermosoudés ensemble.
- 50 **7.** Empaquetage pour sutures (10) de la revendication 6, dans lequel le premier revêtement de polymère (43) et le second revêtement de polymère (44) sont composés chacun de polypropylène.
- 8.** Empaquetage pour sutures (10) de la revendication 6, dans lequel le premier revêtement de polymère (43) est
- 55 composé de polyéthylène.
- 9.** Empaquetage pour sutures (10) de la revendication 6, dans lequel le premier revêtement de polymère (43) est composé d'un copolymère de polyéthylène et d'acétate de vinyle.

10. Embaquetage pour sutures (10) de la revendication 6, dans lequel le thertmosoudage est réalisé à une température entre 104°C (220°F) et 202°C (395°F).
- 5 11. Embaquetage pour sutures (10) de la revendication 6, dans lequel le second revêtement de polymère (44) peut être séparé de la seconde partie de feuille (42) quand le second revêtement de polymère (44) est thermosoudé avec le premier revêtement de polymère (43).
12. Embaquetage pour sutures (10) de la revendication 6, dans lequel le polymère étendu à base de solvant est un polymère étendu par dispersion.
- 10 13. Embaquetage pour sutures (10) de l'une quelconque des revendications précédentes, dans lequel ledit empaquetage présente des coins arrondis (16).
14. Embaquetage pour sutures (10) de l'une quelconque des revendications précédentes, dans lequel la suture (20) est une suture absorbable.
- 15 15. Embaquetage pour sutures (10) de l'une quelconque des revendications 1 à 13, dans lequel la suture (20) est composée d'un matériau de nylon hydrophile préalablement humidifié.
- 20 16. Embaquetage pour sutures (10) de l'une quelconque des revendications précédentes, dans lequel la suture enfermée (20) est attachée à une aiguille (21) et est empaquetée dans un mécanisme support de suture (15) ; et dans lequel, le mécanisme support de suture (15) comprend une partie inférieure (22) présentant un plan, et un moyen (23) placé sur un côté deladite partie inférieure (22) pour maintenir la suture (20) et présenter l'aiguille (21) sur ledit côté, une partie (30) deladite partie inférieure (22), sous-tendant ladite aiguille (21), pouvant être écartée du plan deladite partie inférieure (22).
- 25 17. Embaquetage de sutures (10) de la revendication 16, dans lequel le mécanisme support de suture (15) comprend, de plus, un élément gaine de protection (32) enfermant ledit mécanisme support de suture (15), ladite gaine (32) ayant un dessus, un fond et deux côtés longitudinaux se raccordant auxdits dessus et fond, ledit fond (22) ayant une partie pouvant être écartée sous-tendant la partie pouvant être écartée (30) dudit mécanisme support de suture (15).
- 30 18. Embaquetage de sutures (10) de la revendication 17, dans lequel l'élément gaine de protection (32) présente une partie en découpe sur le dessus deladite gaine de protection (32) pour mettre à nu ladite aiguille (21) sur ledit mécanisme support de suture (15).
- 35 19. Embaquetage de sutures (10) de la revendication 17, dans lequel la partie pouvant être écartée sur l'élément gaine de protection (32) est plus grande que la partie pouvant être écartée (30) sur ledit mécanisme support de suture (15).
- 40 20. Embaquetage pour sutures (10) de l'une quelconque des revendications précédentes, dans lequel au moins une deladite première partie de feuille (41) et deladite seconde partie de feuille (42) présente une couche extérieure à base d'un matériau adhésif (45, 46) adhérent à un revêtement extérieur sur ladite au moins une deladite première partie de feuille (41) et deladite seconde partie de feuille (42).
- 45 21. Embaquetage pour sutures (10) de la revendication 20, dans lequel la matériau adhésif est composé d'un matériau à base d'uréthane.
22. Embaquetage pour sutures (10) de la revendication 20, dans lequel la matériau adhésif est composé d'un adhésif thermofusible.
- 50 23. Embaquetage pour sutures (10) de l'une quelconque des revendications 20 à 22, dans lequel le revêtement extérieur est composé de polypropylène.
24. Embaquetage pour sutures (10) de l'une quelconque des revendications 20 à 22, dans lequel le revêtement extérieur est composé de polyéthylène.
- 55 25. Embaquetage pour sutures (10) de la revendication 24, dans lequel le revêtement extérieur est composé, en outre, de polyester et de nylon.

26. Emballage pour sutures (10) de l'une quelconque des revendications 20 à 25, dans lequel le revêtement extérieur est de 0,006 mm à 0,025 mm (0,25 mil à 1 mil) d'épaisseur.

27. Emballage pour sutures (10) de l'une quelconque des revendications précédentes, dans lequel la rigidité de chacune de la première feuille stratifiée (41) et de la seconde feuille stratifiée (42) n'est pas supérieure à 196 mm par g (0,017 pouce par livre).

28. Système de présentation de sutures comprenant un emballage de sutures (10) comme revendiqué à l'une quelconque des revendications précédentes, suffisamment imperméable à l'humidité pour le stockage de sutures absorbables sensibles à l'humidité (20), et

un mécanisme support de suture stérile (15),

dans lequel ledit emballage (10) est pelable pour permettre à un utilisateur non stérile d'ouvrir ledit emballage (10) par pelage de sorte que ledit mécanisme support de suture stérile (15) peut être transféré par l'utilisateur non stérile depuis une zone non stérile vers une zone stérile ;

dans lequel le mécanisme support de suture stérile (15) comprend une aiguille à suture présentée (21) avec une suture attachée (20), ledit mécanisme support de suture (15) susceptible d'être séparé dudit emballage (10) lorsque transféré vers le champ stérile, et ladite aiguille à suture (21) étant immédiatement accessible à un utilisateur stérile pour présentation à un porte-aiguille quand ledit mécanisme support de suture (15) est séparé de l'emballage de suture (10) dans le champ stérile.




29. Système de suture de la revendication 28, dans lequel ledit mécanisme support de suture (15) comprend :

une partie inférieure à fond plat (22) présentant un plan, et un moyen (23) placé sur un côté de ladite partie inférieure (22) pour maintenir la suture (20) et présenter l'aiguille (21) sur ledit côté, une partie (30) dudit fond plat (22) sous-tendant ladite aiguille (21) pouvant être écartée hors du plan de ladite partie à fond plat (22), et un élément gaine de protection (32) enfermant ledit mécanisme support de suture (15), ladite gaine (32) ayant un dessus, un dessous et deux côtés longitudinaux se raccordant auxdits dessus et dessous, ledit dessous présentant une partie pouvant être écartée, sous-tendant la partie pouvant être écartée (30) dudit mécanisme support de suture (15).

30. Système de suture de la revendication 29, dans lequel ladite gaine de protection (32) est étiquetée pour identifier la suture (20) contenue dans le mécanisme support de suture (15)

31. Système de suture de la revendication 29 ou de la revendication 30, dans lequel l'élément gaine de protection (32) présente une partie en découpe sur le dessus de ladite gaine de protection (32) pour mettre à nu ladite aiguille (21) sur ledit mécanisme support de suture (15).

32. Système de suture selon l'une quelconque des revendications 29 à 31, dans lequel la partie pouvant être écartée sur l'élément gaine de protection (32) est plus grande que la partie pouvant être écartée (30) sur le mécanisme support de suture (15).

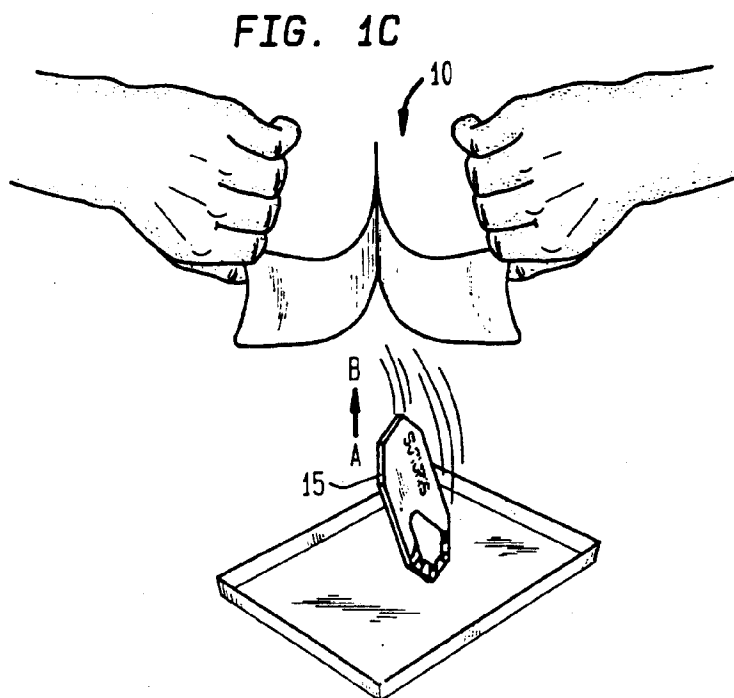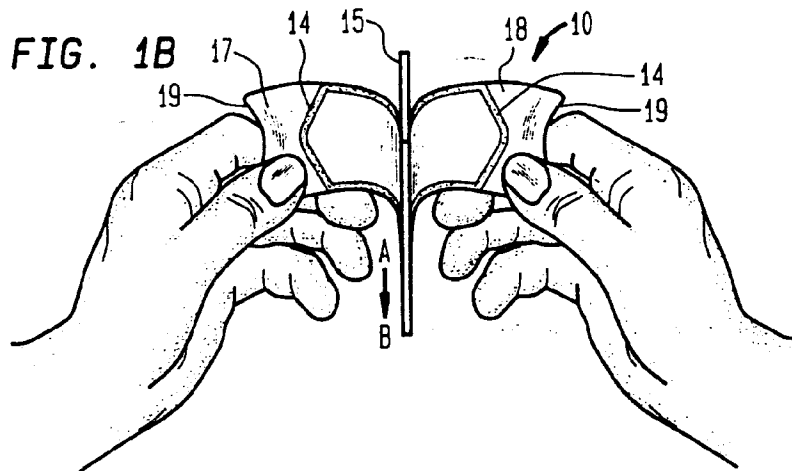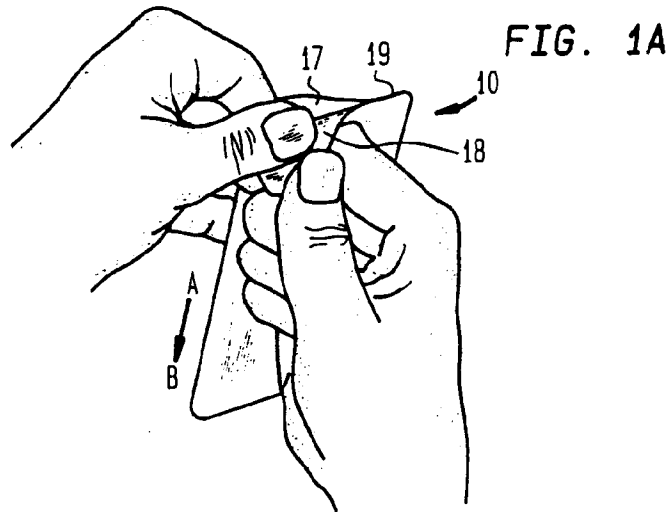

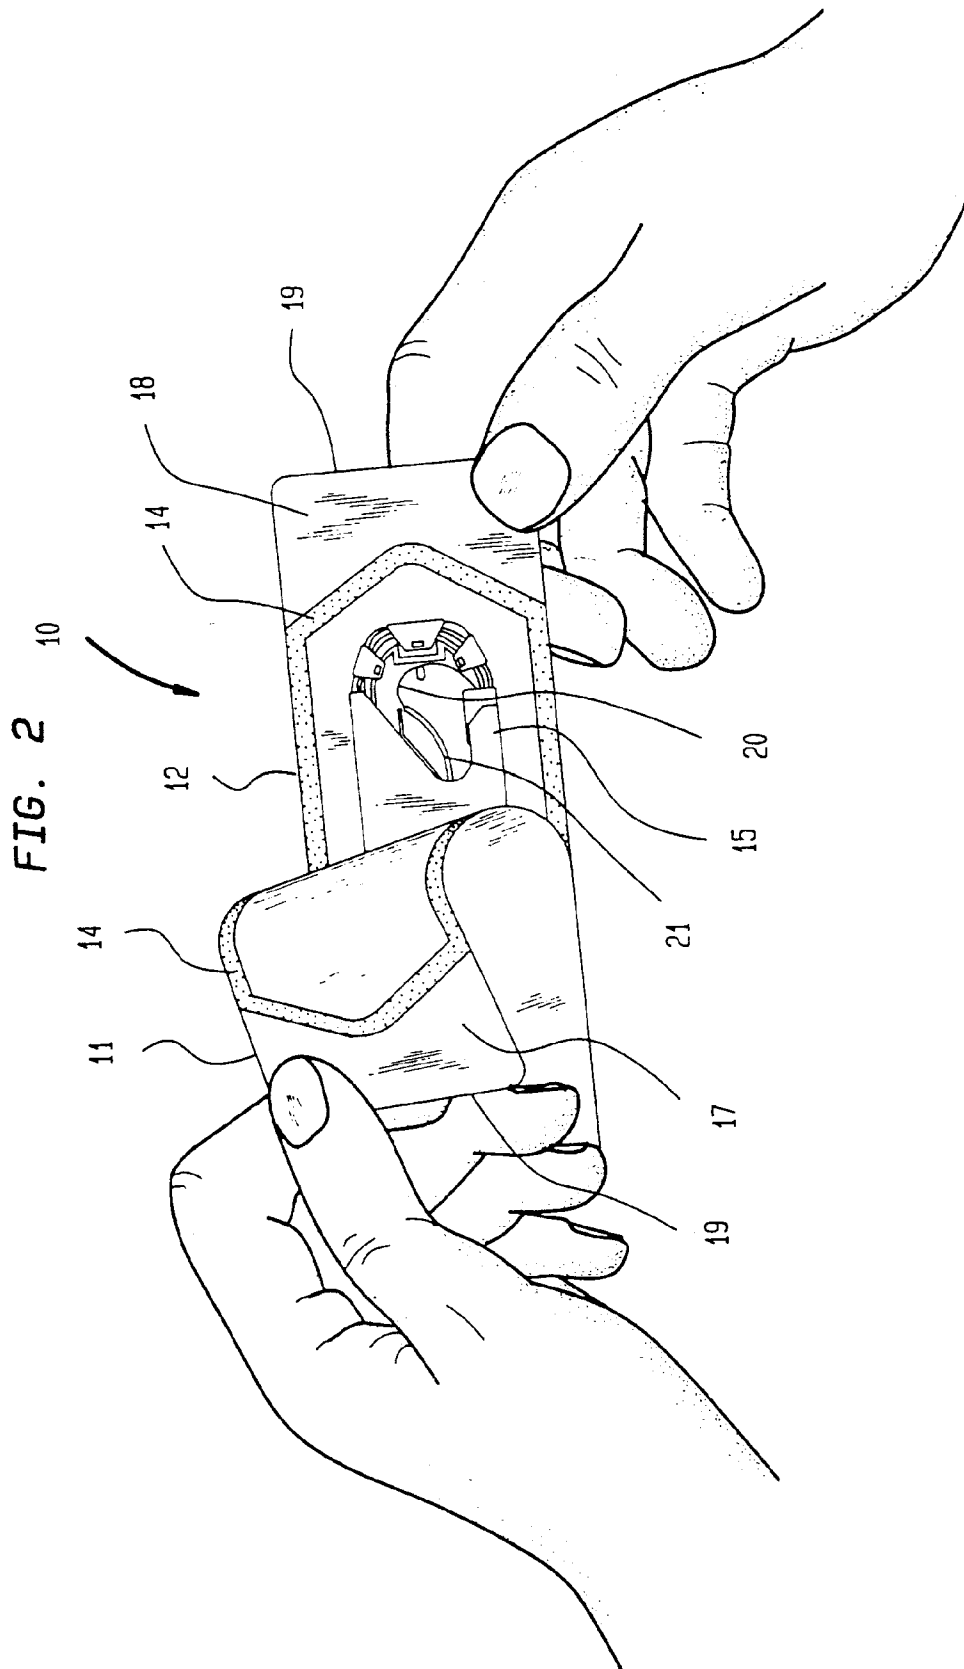




FIG. 3

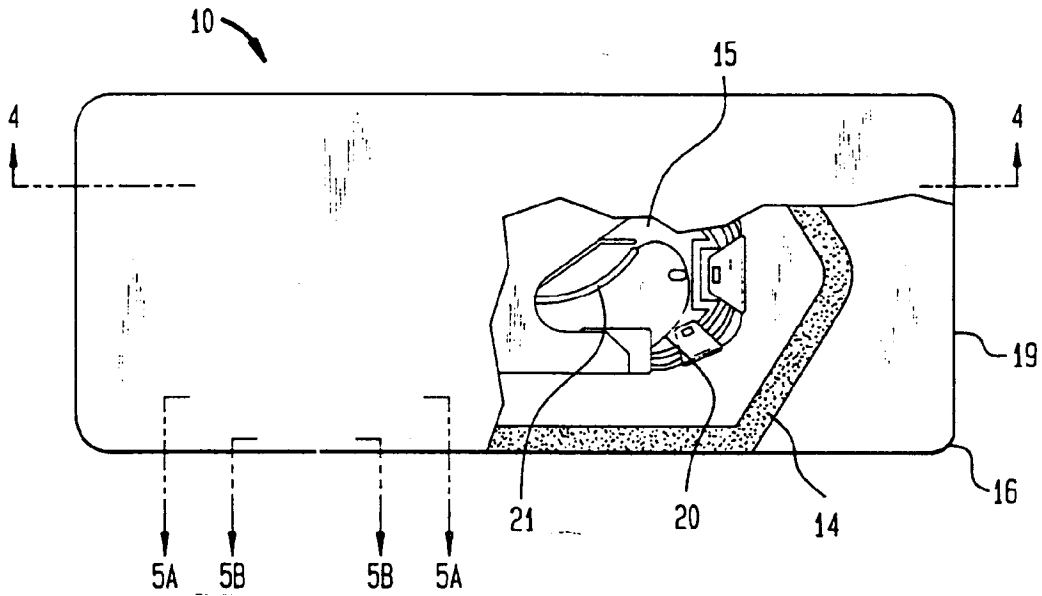


FIG. 4

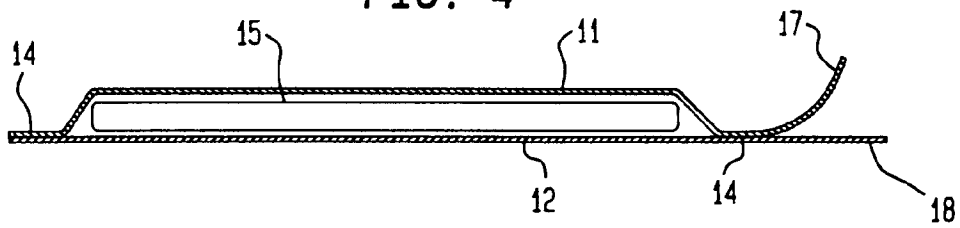


FIG. 5A

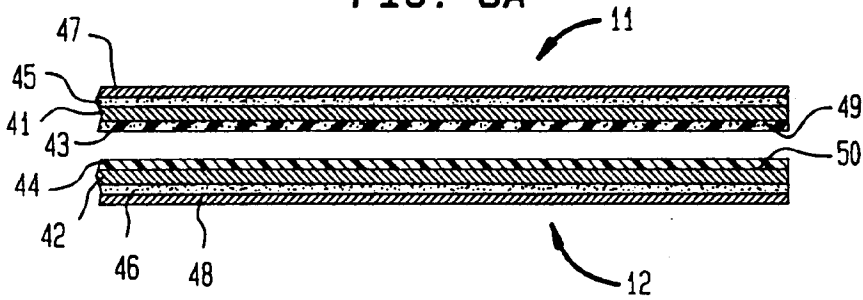


FIG. 5B

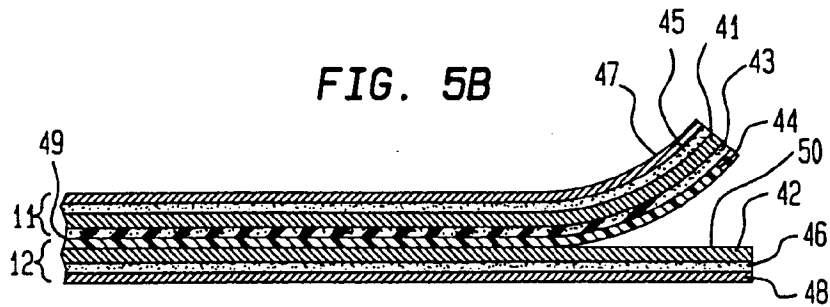


FIG. 6

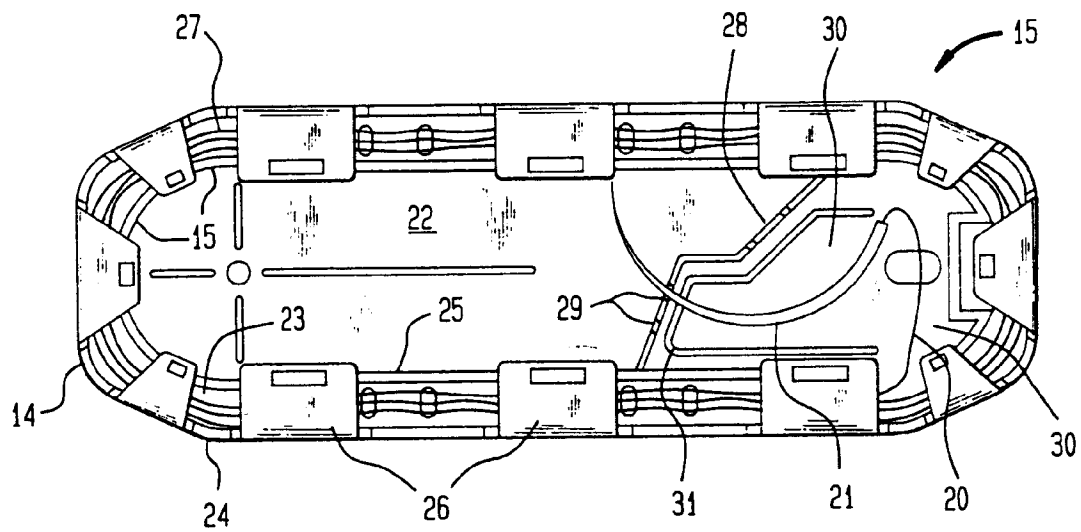


FIG. 7

